

Contents

Symbols used in this manual	8
Symbols on the power tool	8
For your safety	8
Technical specifications	9
Overview	10
Instructions for use	11
Maintenance and care	12
Disposal information	12
Exemption from liability	12

Symbols used in this manual

WARNING!

*Denotes impending danger.
Non-observance of this warning may result in death or extremely severe injuries.*

CAUTION!

*Denotes a possibly dangerous situation.
Non-observance of this warning may result in slight injury or damage to property.*

NOTE

Denotes application tips and important information.

Symbols on the power tool



Before switching on the power tool, read the operating manual!



Disposal information (see page 12)!



Do not look into the light source!



Rough service luminaires

IP54

Dust-proof degree 5 and protection against ingress of water 4

For your safety

WARNING!

Before using the power tool, please read and follow:

- *these operating instructions,*
- *the "General safety instructions" on the handling of power tools in the enclosed booklet (leaflet-no.: 315.915),*
- *the currently valid site rules and the regulations for the prevention of accidents.*

Intended use

The rechargeable LED work light CL 2000 18.0 is designed

- for commercial use in industry and trade,
- for targeted illumination of the workplace,
- for illuminating rooms.

The rechargeable LED work light

CL 2000 18.0 is not suitable

- for use as a headlight.

Safety instructions for rechargeable LED work light


WARNING!

*Read all safety warnings and all instructions. Failure to follow the warnings and instructions may result in electric shock, fire and/or serious injuries. **Save all warnings and instructions for future reference.***


- **Do not use the rechargeable LED work light in a potentially explosive environment.**
- **Do not point the light beam at people or animals and do not look into the light beam, even from far away.**
- **Do not cover the lamp head while the rechargeable LED work light is in use.** The lamp head heats up when in use and the accumulating heat may cause burns.
- **Do not use the rechargeable LED work light as a headlight.**
- **Before performing any work on the rechargeable LED work light (e.g. installation, maintenance, etc.) or transporting or storing it, take the battery out of the rechargeable LED work light.**

- **Do not let children use the rechargeable LED work light.** It is designed for professional use. Children may be accidentally blinded or may blind others.
- **Do not open the battery.** There is a risk of a short-circuit.
- **Protect the battery from heat, e.g. from continuous exposure to sunlight, fire, water and humidity.**
There is a risk of explosion.
- **If the battery is damaged or used improperly, fumes may be emitted.**
Provide fresh air and consult a doctor if you feel unwell. The fumes may irritate the respiratory tract.
- **Recharge only with the charger specified by the manufacturer.** A charger that is suitable for one type of battery pack may create a risk of fire when used with another battery pack.
- **Pointed objects, such as nails or screwdrivers, or external forces may damage the battery.** This may cause an internal short-circuit and the battery to burn, smoke, explode or overheat.
- **The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.**

Technical specifications

	CL 2000 18.0	
Machine type	Rechargeable LED work light	
Lithium-ion battery	V/Ah	18.0 /2.5 or 18.0/5.0
Lighting duration 2.5 Ah 5.0 Ah	h	~ 2.5 ~ 5
Total flux	lm	1200/2000
Weight according to "EPTA Procedure 01/2003" (without battery)	kg	2.4
Size (LxWxH)	mm	230x182.3x189.3
Maximum projected area of the floodlight	m ³	80
Installation height (Indoor use only)	m	≤3
Protection class		III / 

Overview

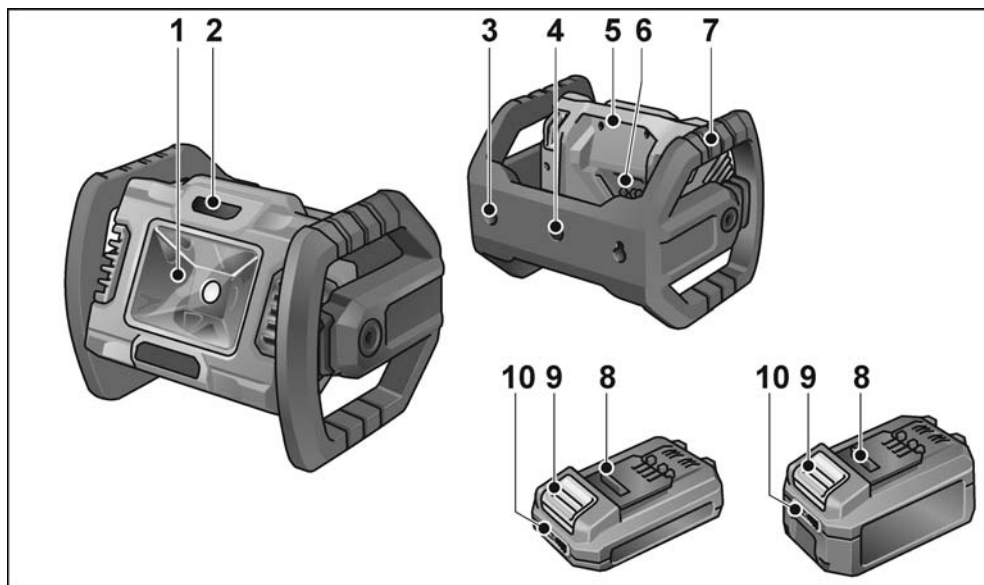

- 1 Protective glass of lamp head
- 2 On/Off switch
- 3 Wall mounting holes
- 4 Threads (5/8") for stand
- 5 Lamp head

- 6 Slot for battery
- 7 Frame
- 8 Li-ion battery (2.5 Ah or 5.0 Ah)
- 9 Release button for battery
- 10 State of charge indicator

Instructions for use



WARNING!


Remove the battery before carrying out any work on the power tool.

Before switching on the power tool


Unpack power tool and accessories and check that no parts are missing or damaged.

Inserting/replacing the battery

- Press charged battery fully into the power tool.

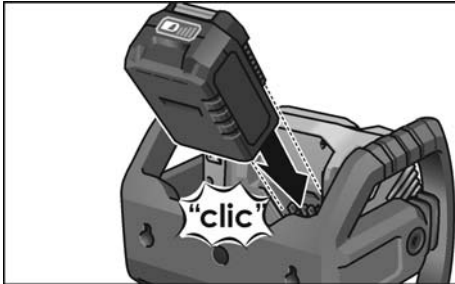

- To remove the battery, press the release buttons (1.) and pull out the battery (2.).

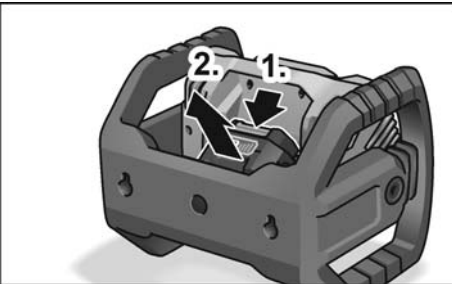


CAUTION!

When the device is not in use, protect the battery contacts. Loose metal parts may short-circuit the contacts; there is a risk of explosion and fire!

Battery state of charge

- Press the button to check the state of charge at the state of charge indicator LEDs.

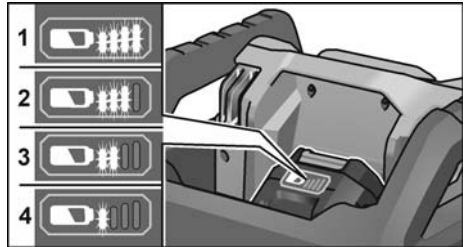


The indicator goes out after 5 seconds.


If one of the LEDs flashes, the battery must be recharged. If none of the LEDs light up after the button is pressed, the battery is faulty and must be replaced.

Switching on and off

- Switch the rechargeable LED work light on and off by pressing the on/off switch. Press again to adjust the light intensity.

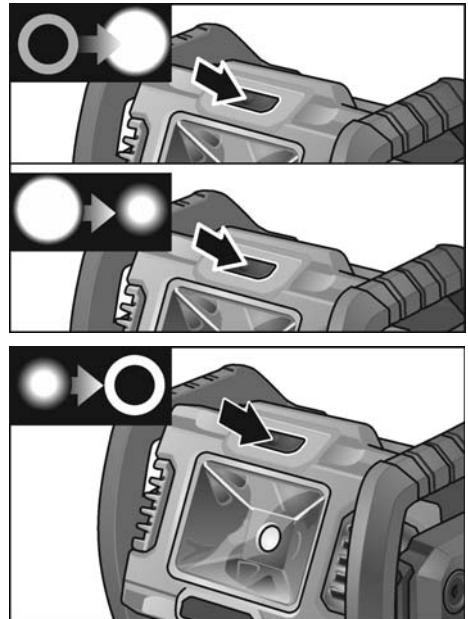


- The lamp head can be turned 360° in the frame.

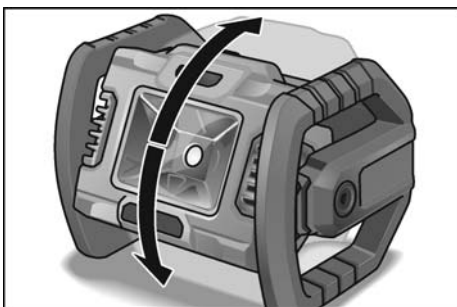

Mounting

- To mount the rechargeable LED work light on the wall or on a stand, use the wall mounting holes/threads (5/8").

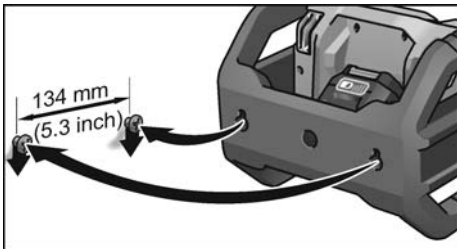

Maintenance and care

Cleaning

WARNING!

Before performing any work, pull out the mains plug. Do not use water or liquid detergents.

- Remove dirt and dust from the housing with a paint brush or dry cloth.

Repairs

Repairs may be carried out by an authorised customer service centre only.

Spare parts and accessories

Exploded drawings and spare-part lists can be found on our homepage:

www.flex-tools.com

Disposal information

WARNING!

Render redundant power tools unusable:

- mains operated power tool by removing the power cord,
- battery operated power tool by removing the battery.



EU countries only:

Do not dispose of electric power tools in the household waste!

In accordance with the European Directive 2012/19/EU on Waste Electrical and Electronic Equipment and its incorporation into national law, used power tools must be collected separately and recycled in an environmentally friendly manner.



Raw material recovery instead of waste disposal.

Device, accessories and packaging should be recycled in an environmentally friendly manner. Plastic parts are identified for recycling according to material type.



WARNING!

Do not throw batteries into the household waste, fire or water. Do not open used batteries.

Accumulators/batteries should be collected, recycled or disposed of in an environmentally friendly manner.



EU countries only:

In accordance with Directive 2006/66/EC defective or used batteries must be recycled



NOTE

Please ask your dealer about disposal options!

Exemption from liability

The manufacturer and his representative are not liable for any damage and lost profit due to interruption in business caused by the product or by an unusable product.

The manufacturer and his representative are not liable for any damage which was caused by improper use of the power tool or by use of the power tool with products from other manufacturers.