


Product data sheet

Status: 16.12.2020 | 13:37

Item no. 1314

Beschichtungsseite
coated side | côté du revêtement

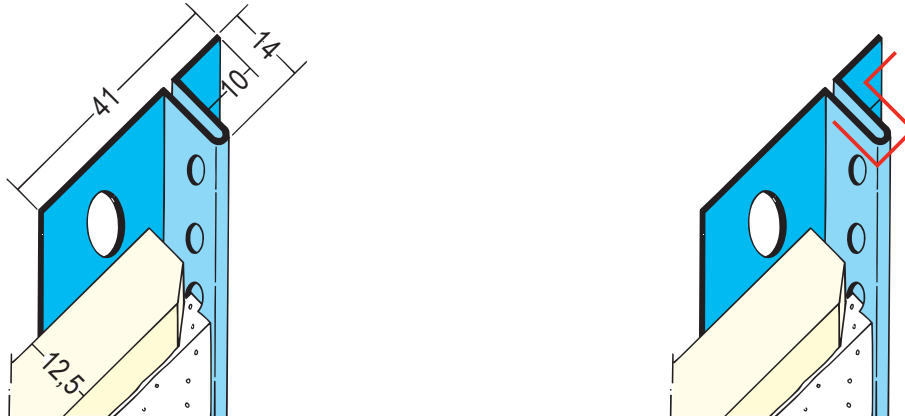

| | |
|-------------------------------|--|
| Designation | Connecting profile for dry lining 12,5 mm PB |
| Description | Stop profile made of galvanised steel for assemblies underneath plasterboard panels, with a 10-mm shadow joint. For creating plastered single edges at plastered junctions, e. g. sliding ceiling and wall connections, for 12.5-mm plasterboard panels. |
| Line of Business | Plaster |
| Productclass | Accessory profiles for drylining purposes |
| Productgroup | Render stops / Architrave beads |
| Plaster thickness | 1,0 mm |
| Material | Galvanised steel |
| GK/Plate | 12,5 mm |
| Standard EN | EN 14353 |
| Standard | EN 13658-1 |
| Product length | 250,0 cm, 300,0 cm |
| Reaction to fire (R2F) | A1 |
| Packaging Unit | 15 BAR / 95 BUN |

This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general. Terms and conditions. Please observe the application assembly and storage guidelines.

All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!

PROTEKTORWERK
Florenz Maisch GmbH & Co. KG
Postfach 1420, D-76554 Gaggenau
Viktoriastr. 58, D-76571 Gaggenau

Tel. +49 7225 977 - 0
Fax +49 7225 9 77 - 111
info@protektor.com
www.protektor.com

