


Product data sheet

Status: 08.09.2020 | 14:33

Item no. 1751

Beschichtungsseite

coated side | côté du revêtement

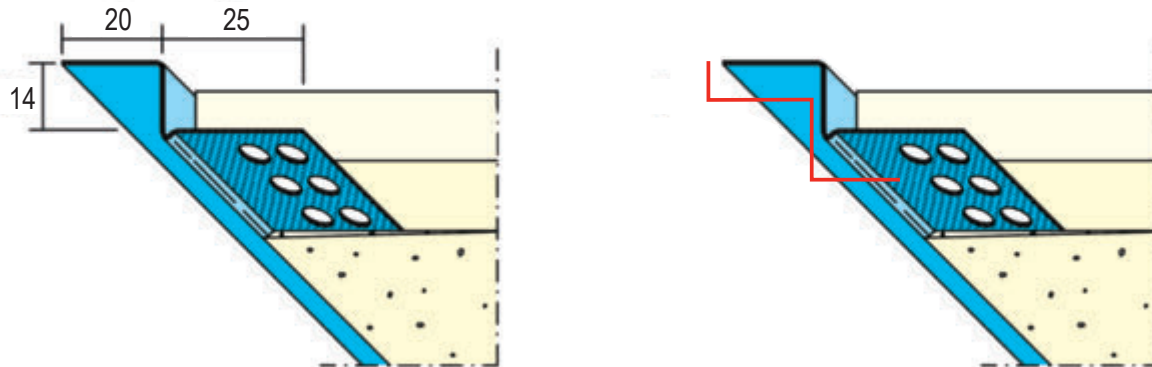

Designation	Connecting profile for dry lining 12,5 mm PB
Description	Galvanised steel render stop with 20-mm shadow joint. For creating plastered single edges at plastered junctions, e.g. sliding ceiling and wall connections, for 12.5-mm plasterboard panels.
Line of Business	Plaster
Productclass	Accessory profiles for drylining purposes
Productgroup	Render stops / Architave beads
Plaster thickness	1,0 mm
Material	Galvanised steel
GK/Plate	12,5 mm
Material thickness	0,4 mm
Standard EN	EN 14353
Product length	300,0 cm
Reaction to fire (R2F)	A1
Packaging Unit	25 BAR / 120 BUN
	Please observe the following data sheets: *Data sheet Planning and Application of Metallic Plaster Profiles; published by: The European Association of Bead and Lath Producers, www.europrofiles.com *Data sheet Plaster and Dry Construction in Damp Environments; published by: Zentralverband des Deutschen Baugewerbes, www.zdb.de *Data sheet Winter Construction Sites; published by: Bundesverband der Gipsindustrie e.V., www.gips.de

This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general. Terms and conditions. Please observe the application assembly and storage guidelines.

All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!

PROTEKTORWERK
Florenz Maisch GmbH & Co. KG
Postfach 1420, D-76554 Gaggenau
Viktoriastr. 58, D-76571 Gaggenau

Tel. +49 7225 977 - 0
Fax +49 7225 9 77 - 111
info@protektor.com
www.protektor.com

