


Product data sheet

Status: 05.10.2020 | 11:06

Item no. 3793

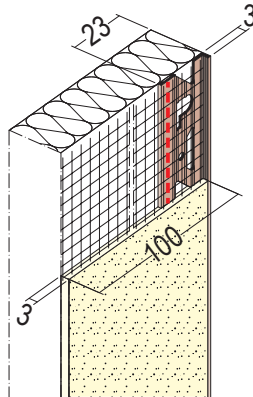

Designation	Stop profile with mesh for thermal insulation 3 mm
Description	PROTEKTOR Plaster stop profiles made of PVC, with sewn attached alkali-resistant fiberglass mesh, for plaster thicknesses of 3 mm and greater applied to heat insulation.
Line of Business	Plaster
Productclass	Profiles for thermal insulation
Productgroup	Connecting profiles / Plaster stops
Plaster thickness	3,0 mm
Material	Rigid PVC with glass fibre mesh
Product length	250,0 cm
Productcolor	■ weiß (10)
Packaging Unit	50 BAR / 40 CAR
	One-sided tissue protrusion of 10 cm at the end of the bar.

This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general Terms and conditions. Please observe the application assembly and storage guidelines.

All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!

PROTEKTORWERK
Florenz Maisch GmbH & Co. KG
Postfach 1420, D-76554 Gaggenau
Viktoriastr. 58, D-76571 Gaggenau

Tel. +49 7225 977-0
Fax +49 7225 9 77-111
info@protektor.com
www.protektor.com

